


Strekfast innstøpningsrør

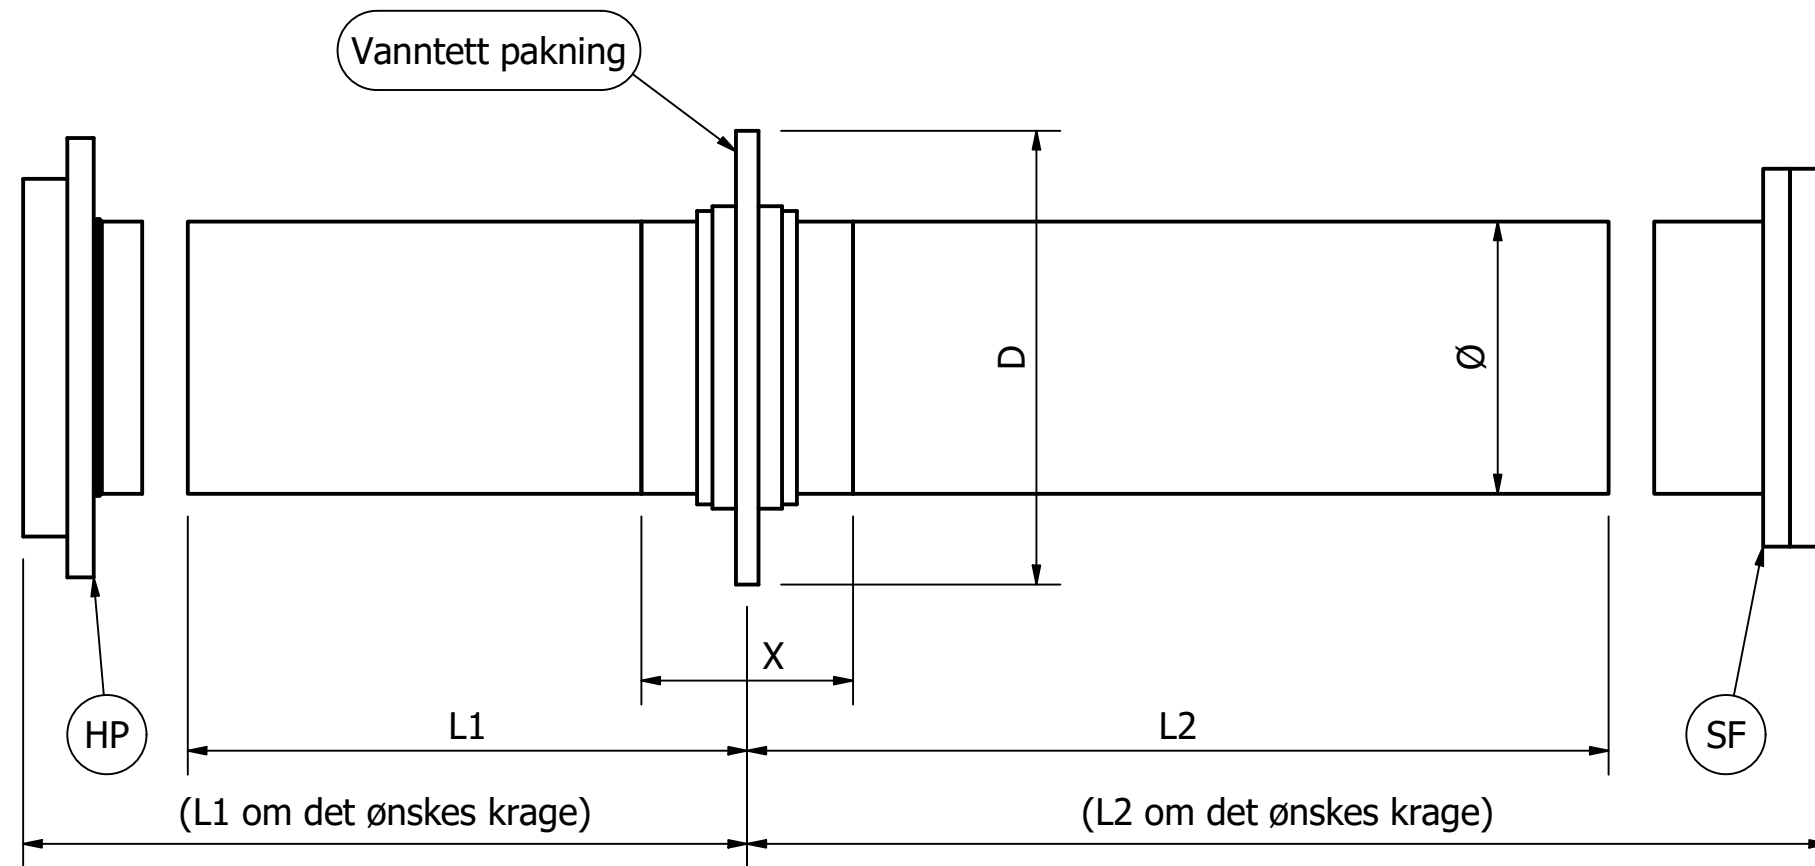

Dimensjon Ø	X	D
90	140	210
110	140	225
125	140	240
140	140	260
160	140	280
180	140	300
200	140	325
225	140	350
250	140	380
280	140	415
315	200	430
355	200	475
400	200	525
450	200	575
500	200	635
560	200	705
630	200	785
710	200	875
800	200	975
900	200	1075
1000	200	1175
1200	200	1375

Skriv inn ønskede data her	
Diameter Ø (90-1200mm)	
SDR-klasse (26-7,4)	
Lengde L1 (50-1000mm)	
Lengde L2 (50-1000mm)	
Vanntett pakning (Ja / Nei)	
Antall innstøpningsrør	
Merking (VK1, best.nr. el.lign.)	

Ønskes krage og flens påsveist i endene?	Ende L1	Ende L2
Kragetype (HP-High Pressure, SF-Reduksjonskrage, STD-Standard)		
Flens (Kompositt, Galvanisert, RILSAN, PP/stål, Rustfri, Syrefast)		
PN-klasse (10-16-25)		

Designed by bjorn.gauteplass	Checked by	Approved by	Date	Date 25.02.2020
Hallingplast AS		Gen.tol. NS-ISO 2768-1 VC		
		Innmuringskrage180-02	Edition	Sheet 1 / 1

Rør-toleranser iht. EN12201